


PTO ASSEMBLY DRAWING

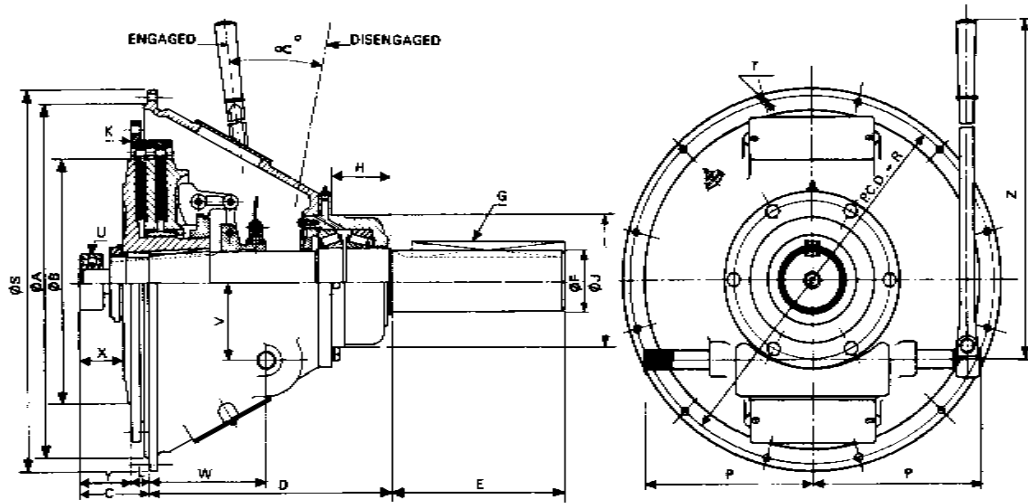

HOUSING SPECIFICATIONS

SAE Housing Number	A	R	S	T		P
				No.	Dia.	
6	10-1/2 266.7	11-1/4 285.7	12-1/8 307.9	8	13/32 10.3	7-3/4 196.8
5	12-3/8 314.3	13-1/8 333.3	14 355.6	8	13/32 10.3	7-3/4 196.8
4	14-1/4 361.9	15 381	15-7/8 403.2	12	13/32 10.3	7-3/4 196.8
3	16-1/8 409.5	16-7/8 428.6	17-3/4 450.8	12	13/32 10.3	9-3/4 247.6

SAE Housing Number	A	R	S	T		P
				No.	Dia.	
2	17-5/8 447.6	18-3/8 466.7	19-1/4 488.9	12	13/32 10.3	9-3/4 247.6
1	20-1/8 511.2	20-7/8 530.2	21-3/4 552.4	12	15/32 11.9	9-3/4 247.6
0	25-1/2 647.7	26-3/4 679.4	28 711.2	16	17/32 13.5	12-3/4 323.8

INSTALLATION DETAILS

PTO Model	Housing Length D	Shaft			Clutch dia. B	C	H	J	Pilot Bearing U			V	W	X	Y	L	Hand Lever Travel OC	Z	Driving Ring Number K
		Dia. F +0.000 -0.001 +0.000 -0.026	Length E	Keyway G					∅ +0.0000 -0.0005 +0.0000 -0.0125	Width +0.000 -0.005 +0.0000 -0.125	Type								
001-06	5-9/16 141.30	1-7/16 36.50	3-1/2 88.9	3/8 x 3/16 9.52 x 4.76	6-1/2 165.1	2-13/16 71.44	7/8 22.22	4-1/2 114.3	2.0472 51.99	0.5856 14.87	205 SF	3 76.20	2-1/8 53.97	1-5/16 33.33	1-5/8 41.27	1-3/16 30.16	13°	15-3/8 390.52	6X-325
001-07	5-9/16 141.30	1-7/16 36.50	3-1/2 88.9	3/8 x 3/16 9.52 x 4.76	7-1/2 190.5	2-13/16 71.44	7/8 22.22	4-1/2 114.3	2.0472 51.99	0.5856 14.87	205 SF	3 76.20	2-1/8 53.97	1-5/16 33.33	1-5/8 41.27	1-3/16 30.16	13°	15-3/8 390.52	7X-312
CN1-06	7-1/16 179.40	1-7/16 36.50	3-1/2 88.9	3/8 x 3/16 9.52 x 4.76	6-1/2 165.1	2-13/16 71.44	2-11/32 59.53	5 127.0	2.0472 51.99	0.5856 14.87	205 SF	3 76.20	2-1/8 53.97	1-5/16 33.33	1-5/8 41.27	1-3/16 30.16	13°	15-3/8 390.52	6X-325
CN1-07	7-1/16 179.40	1-7/16 36.50	3-1/2 88.9	3/8 x 3/16 9.52 x 4.76	7-1/2 190.5	2-13/16 71.44	2-11/32 59.53	5 127.0	2.0472 51.99	0.5856 14.87	205 SF	3 76.20	2-1/8 53.97	1-5/16 33.33	1-5/8 41.27	1-3/16 30.16	13°	15-3/8 390.52	7X-312
C01-08	7-1/16 179.40	1-3/4 44.45	6 152.40	1/2 x 1/4 12.7 x 6.35	8 203.20	3-15/16 100.0	2-11/32 59.53	5 127.0	2.4409 61.99	0.6643 18.87	305 SF	3 76.20	1-7/8 47.62	1-1/4 31.75	1-1/2 38.10	2-7/16 60.90	17°	15-3/8 390.52	8X-298
C01-10	8-5/8 219.07	2-1/4 57.15	5-1/2 139.70	5/8 x 5/16 15.87 x 7.94	10 254.0	3-15/16 100.0	3-3/4 95.25	5-3/4 146.05	2.8346 71.99	1.1825 30.03	306 SFFC	3 76.20	2 50.80	1-9/16 39.70	1-13/16 46.04	2-1/8 53.97	15°	15-3/8 390.52	10X-149
C01-11	9-1/4 234.95	2-1/4 57.15	6-1/2 165.10	5/8 x 5/16 15.87 x 7.94	11-3/8 288.92	3-15/16 100.0	3-3/4 95.25	5-3/4 146.05	2.8346 71.99	1.1825 30.03	306 SFFC	3 76.20	3-3/16 80.96	1-5/16 49.20	2-3/8 60.32	1-9/16 39.70	15-1/2°	15-3/8 390.52	11X-150
C02-11 CN2-11	9-5/8 244.47	2-1/2 63.50	6-1/2 165.10	5/8 x 5/16 15.87 x 7.94	11-3/8 288.92	3-15/16 100.0	3 76.20	6-1/2 165.10	2.8346 71.99	1.1825 30.03	306 SFFC	3-3/4 95.25	4-1/16 103.20	2 50.80	2-3/8 60.32	1-9/16 39.70	15-1/2°	15-3/8 390.52	11X-151
C01-14 CN1-14	12-1/8 307.97	3 76.20	8-1/2 215.90	3/4 x 3/8 19.05 x 9.52	14 355.6	3-15/16 100.0	3-7/16 87.31	6-21/32 169.00	3.1496 79.99	1.370 34.80	307 SFFC	4-1/2 114.30	5-7/16 138.11	2-9/16 65.10	2-15/16 74.60	1 25.40	18°	23-3/8 593.72	14X-152
C02-14 CN2-14	13-3/4 349.25	3-1/2 88.90	10 254.00	7/8 x 7/16 22.22 x 11.11	14 355.6	3-15/16 100.0	3-3/8 85.72	7-1/2 190.50	3.1496 79.99	1.370 34.80	307 SFFC	4-1/2 114.30	6-5/8 168.27	2-7/16 61.90	2-15/16 74.60	1 25.40	18°	23-3/8 593.72	14X-153
C03-14 CN3-14	14-1/2 368.30	3-15/16 100.00	10 254.00	1 x 1/2 25.4 x 12.7	14 355.6	3-15/16 100.0	3-3/8 85.72	7-1/2 190.50	3.9370 100	1.7717 45	309 SFFC	4-1/2 114.30	7-3/4 196.85	2-1/2 63.50	2-15/16 74.60	1 25.40	18°	23-3/8 593.72	14X-154

Note: shaded areas are metric.